


Check Valve, Ball Type

SC1F-A2

3/4-16 UNF • Q_{max} 40 l/min (11 GPM) • p_{max} 420 bar (6100 PSI)

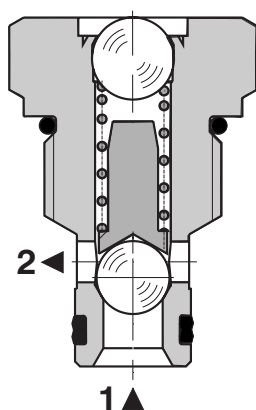

Technical Features

- › Hardened precision parts
- › Sharp-edged steel seats for dirt-tolerant performance
- › Leak-free closing, suitable for fast cycling with long life
- › High flow capacity
- › Optional bias spring ranges for back-pressure control
- › In the standard version, the valve is zinc-coated for 520 h protection acc. to ISO 9227

Functional Description

A hydraulic check valve in the form of a screw-in cartridge-style for use as a blocking or load-holding device. The cartridge has a ball check which is closed by spring until sufficient pressure is applied at port 1 to open flow to port 2.

Symbol




Technical Data


Valve size / Cartridge cavity		3/4-16 UNF-2A / A2 (C-8-2)			
Max. flow	l/min (GPM)	40 (10.6)			
Max. operating pressure	bar (PSI)	420 (6090)			
Cracking pressure	bar (PSI)	0.5 (7.3)	1.5 (21.8)	3.5 (50.8)	7.0 (101.5)
Fluid temperature range (NBR)	°C (°F)	-30 +100 (-22 ... +212)			
Fluid temperature range (FPM)	°C (°F)	-20 +120 (-4 ... +248)			
Weight	kg (lbs)	0.06 (0.13)			

		Datasheet	Type
General information		GI_0060	Products and operating conditions
Valve bodies	In-line mounted	SB_0018	SB-A2*
	Sandwich mounted	SB-04(06)_0028	SB-*A2*
Cavity details / Form tools		SMT_0019	SMT-A2*
Spare parts		SP_8010	

Characteristics measured at $v = 32 \text{ mm}^2/\text{s}$ (156 SUS)

Pressure drop related to flow rate

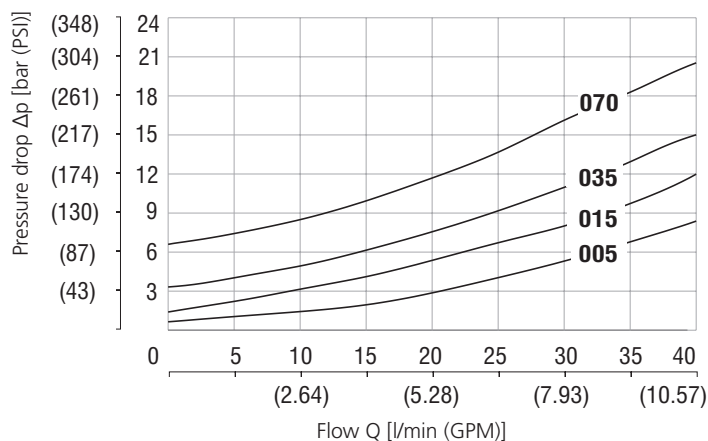

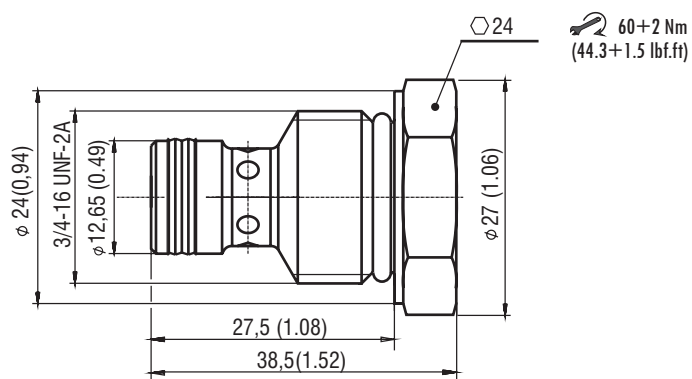Dimensions in millimeters (inches)

Ordering Code

SC1F - A2 / H				- B	
Check valve, ball type	Valve cavity 3/4-16 UNF (C-8-2)	Model High performance	000 002 005 015 035 070	No designation V	Surface treatment zinc-coated (ZnNi), ISO 9227 (520 h)
					Seals NBR FPM (Viton)
				Cracking pressure without spring 0.2 bar (2.9 PSI) 0.5 bar (7.3 PSI) 1.5 bar (21.8 PSI) 3.5 bar (50.8 PSI) 7.0 bar (101.5 PSI)	