

DIESEL ENGINE SPARK ARRESTERS

RVS range

Engine
Safety



Snijder Filtertechniek bv
Postbus 69, 8060 AB Hasselt
Randweg 1, 8061 RW Hasselt
Tel. 038 4773800 Fax. 038 4773888



ATEX
Approved

SPARK ARRESTOR



RVS range

WT 1L RANGE

- Single Centrifuge Type.
- Minimal Back Pressure.
- Good Silencing.
- Designed for modern & conventional diesel engines.
- Especially designed for temporary use or
- End of line addition to an existing exhaust layout.
- Used in conjunction with existing silencer.
- Improved internal gas flow dynamics.

WT 2L RANGE

- Twin Centrifuge Type.
- Minimal Back Pressure.
- Good Silencing.
- Designed for modern & conventional diesel engines
- Intended for permanent installation.
- Used with or as replacement for muffler
- Improved internal gas flow dynamics.
- Centrifugal Range

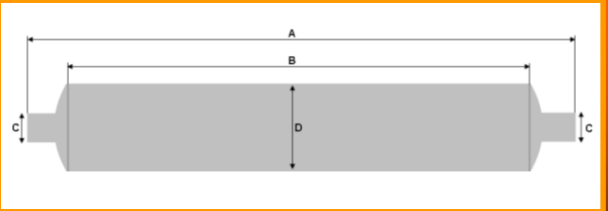

When ordering a RVS Spark Arrestor please specify pipe size!



MODEL	PK-Range	Max. CFM-M ³ /min	Weight	Dim. A mm	Dim. B mm	Dim. C mm	Dim. D mm
WT1L92	5 ~ 25	138 – 3,9	1,6 kg.	353	135	32 / 38 / 45	92.4
WT1L125	15 ~ 35	193 – 5,5	2,5 kg.	369	145	38 / 45 / 51	127.4
WT1L152	20 ~ 50	275 – 7,8	3 kg.	393	165	45 / 51 / 57 / 64	152
WT1L175	30 ~ 70	385 – 10,9	4 kg.	434	200	51 / 57 / 64	177.4
WT1L205	40 ~ 90	495 – 14,0	5 kg.	450	205	57 / 64 / 70	202.4
WT1L235	70 ~ 130	715 – 20,2	5 kg.	487	235	64 / 70 / 77 / 89	233.5
WT1L300	90 ~ 165	908 – 25,7	9 kg.	550	300	89 / 102	305
MODEL	PK-Range	Max. CFM-M ³ /min	Weight	Dim. A mm	Dim. B mm	Dim. C mm	Dim. D mm
TGSA30L	10 ~ 45	248 – 7,0	2 kg.	490	305	32 / 38 / 45 / 51	92.4
WT2L90	20 ~ 50	275 – 7,8	3 kg.	640	455	32 / 38 / 45 / 51	92.4
WT2L125	30 ~ 80	440 – 12,5	4 kg.	680	500	45 / 51 / 57 / 64	127.4
TGS2L155	25 ~ 80	440 – 12,5	3 kg.	465	275	38 / 45 / 51 / 57	152.4
WT2L150	50 ~ 120	660 – 18,7	6 kg.	885	665	57 / 64 / 70 / 77	152.4
WT2L150X	50 ~ 120	660 – 18,7	5,5 kg.	728	507	57 / 64 / 70 / 77	152.4
WT2L175	95 ~ 200	1100 – 31,1	8 kg.	971	750	77 / 89 / 102	177.4
WT2L200	150 ~ 340	1870 – 53,0	11 kg.	1145	910	102 / 115	202.4
WT2L235	250 ~ 450	2475 – 70,1	15 kg.	1335	1110	115 / 128 / 153	233.5
WT2L300	325 ~ 550	3025 – 85,7	26 kg.	1490	1250	140 / 153 / 178	305
WT2L360	475 ~ 750	4125 – 116,8	47 kg.	1758	1500	153 / 203	356.5